



NAKAMURA

MOTORIZZATI/DRIVEN TOOLS NAKAMURA TW10-WT150-250 WTW150-WTS150 SC150-250

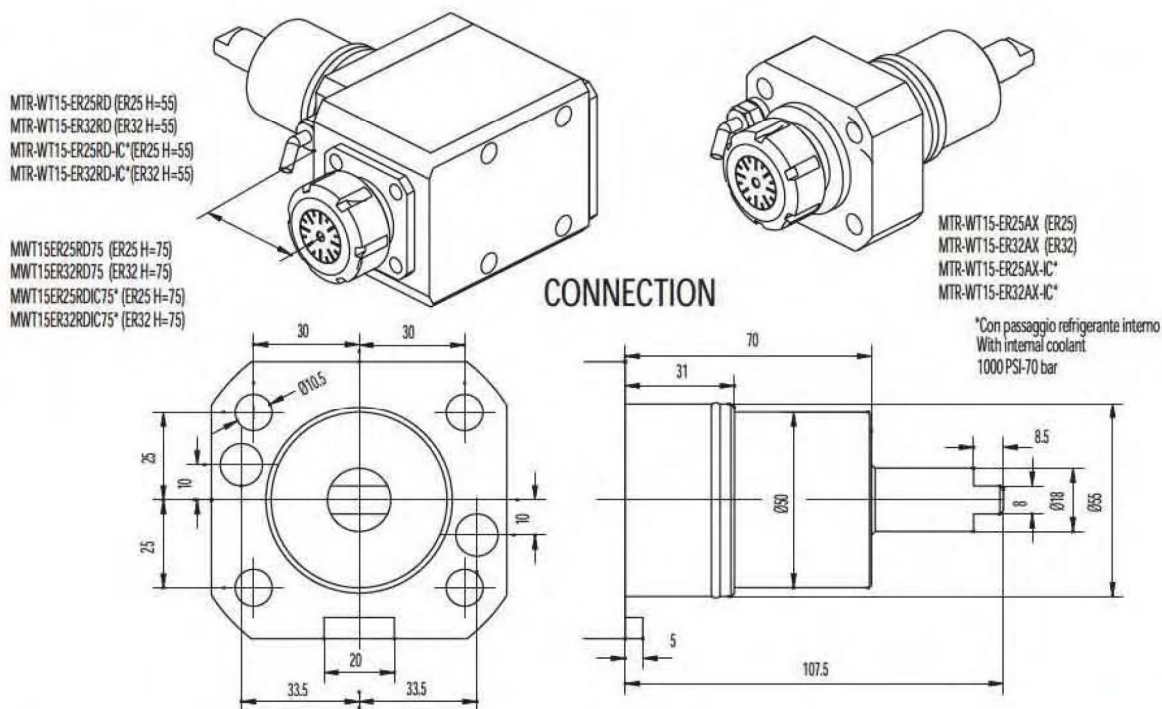


NAKAMURA TW20-WT300-SC300

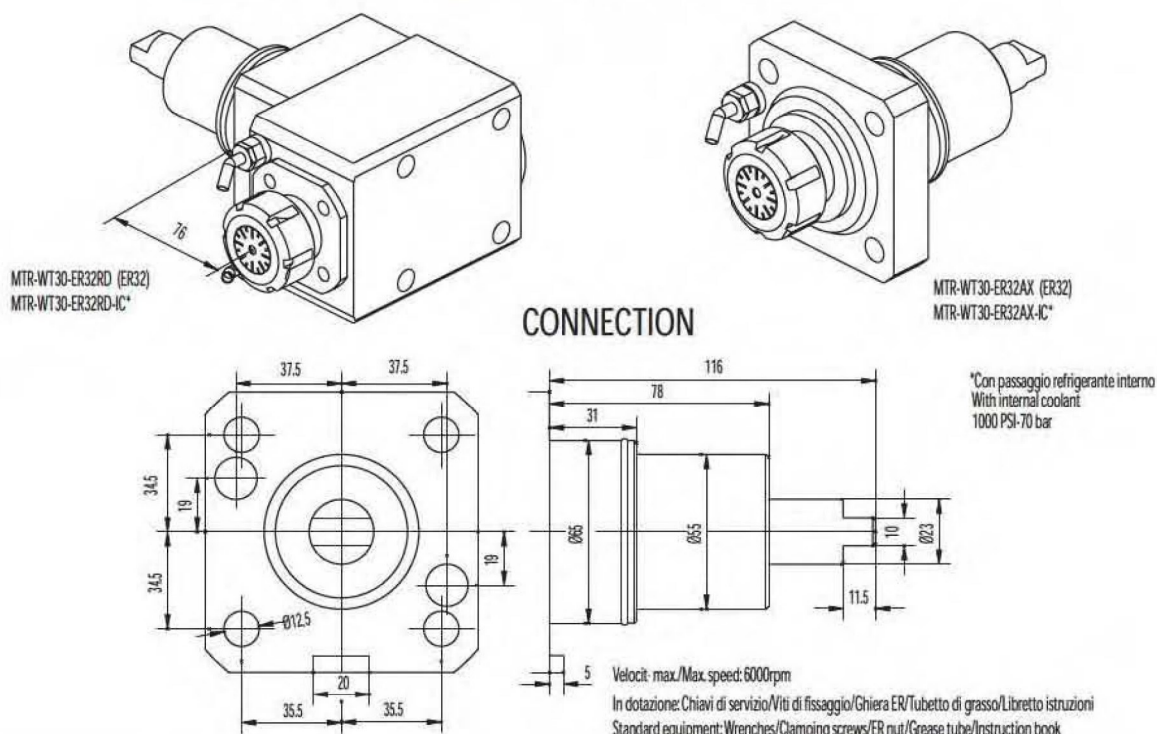


NAKAMURA

MOTORIZZATI/DRIVEN TOOLS
NAKAMURA WT100-NTY3

MOTORIZZATI / DRIVEN TOOLS
NAKAMURA WT100-NTY3

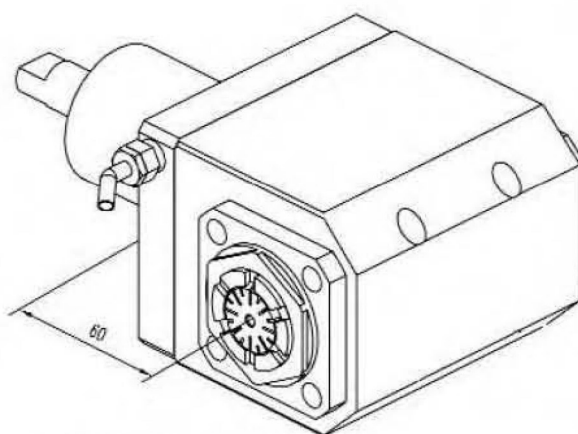


MTR-WT10-FR25RD (FR25A)
MTR-WT10-ER25RD-IC*

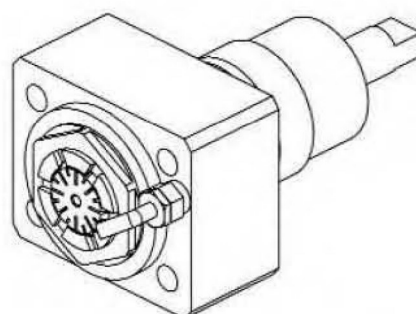

MTR-WT10-FR25AX (FR25A)
MTR-WT10-ER25AX-IC*

*Con passaggio refrigerante interno
With internal coolant
1000 PSI-70 bar

CONNECTION

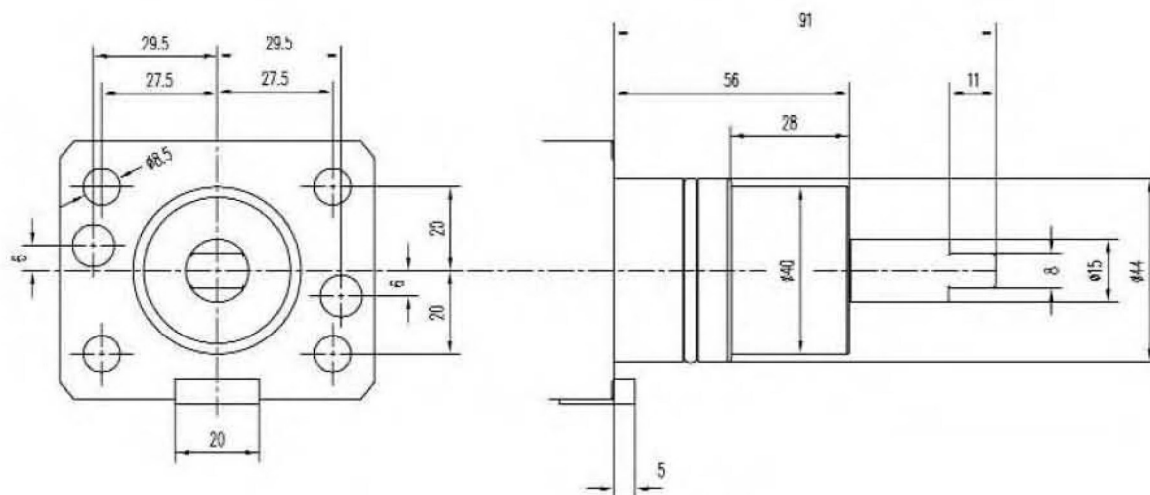


Velocity max./Max. speed: 6000rpm

In dotazione: Chiavi di servizio/Viti di fissaggio/Chiera ER/Tubetto di grasso/Libretto istruzioni
Standard equipment: Wrenches/Clamping screws/ER nut/Grease tube/Instruction book


Standard equipment: Wrenches/Clamping screws/FR nut/Grease tube/Instruction book

NAKAMURA TOME TW10




W1411

Face and O.D.
cutting holder




W1412

Face and O.D.
cutting holder




W1413

Face and O.D.
cutting holder




W1414

Face and O.D.
cutting holder




W1415

Face and I.D.
cutting holder




W1431/2

Face and O.D.
cutting holder




W1417 D25 (H=55 mm)
W4437 D25 (H=75 mm)

Combi toolholder
for boring bar and
insert drill
Ø25 mm




W1418 D25


Double toolholder
for boring bar
Ø25 mm



Qualified tool
20x20 mm



121-22075 (h=26 mm H=95 mm)
121-22076 (h=32 mm H=100 mm)



121-22056

Face and O.D.
cutting holder
HSK 40 A+C




Cut-off holder



Cut-off tool



CONNECTION

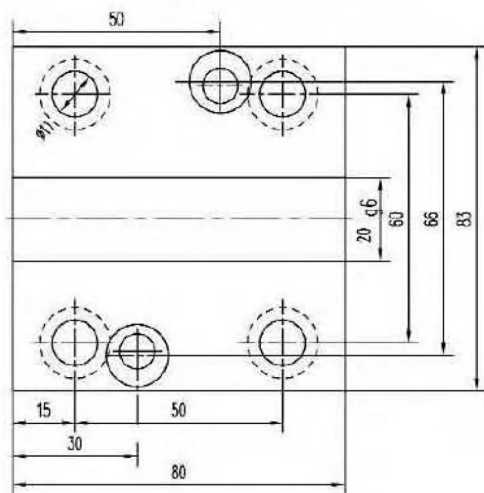

ACCESSORIES

Boring bar sleeve and
throw-away drill socket

- 739.0125.020 TW10 (Ø20 mm)
- 739.0125.016 TW10 (Ø16 mm)
- 739.0125.012 TW10 (Ø12 mm)
- 739.0125.010 TW10 (Ø10 mm)
- 739.0125.008 TW10 (Ø8 mm)
- 739.0125.006 TW10 (Ø6 mm)




121-22057

Boring bar holder


HSK 40 A+C

NAKAMURA TOME

TW20 - WT300 - SC300

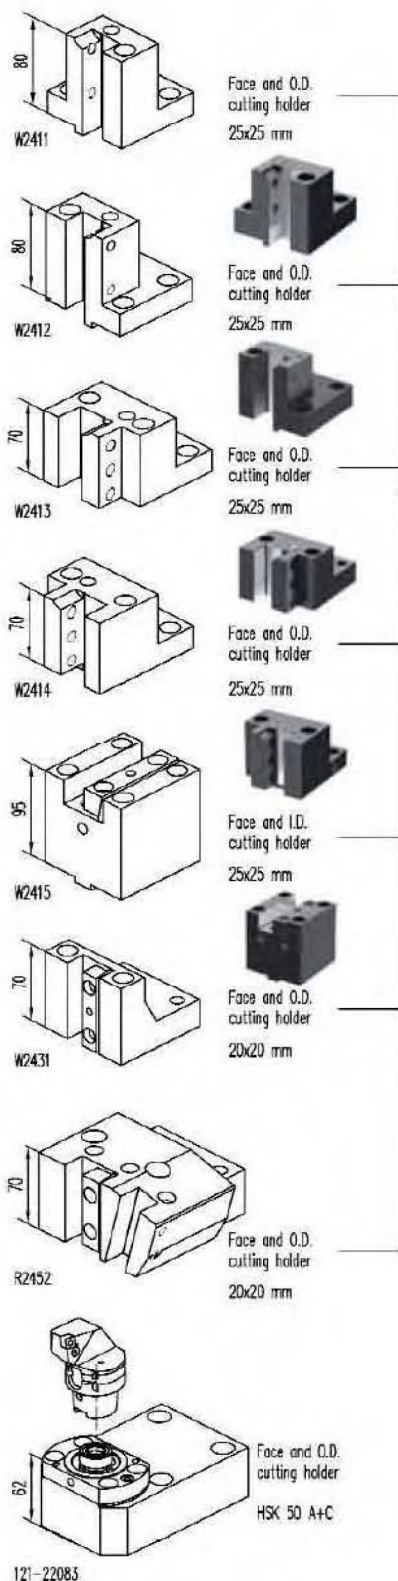


ACCESSORIES




Boring bar sleeve and
throw-away drill socket

739.0132.025	TW20	{ $\phi 25$ mm}
739.0132.020	TW20	{ $\phi 20$ mm}
739.0132.016	TW20	{ $\phi 16$ mm}
739.0132.012	TW20	{ $\phi 12$ mm}
739.0132.010	TW20	{ $\phi 10$ mm}
739.0132.008	TW20	{ $\phi 8$ mm}




Qualified tool




Bringing bar sleeve

739.0125.020	TW20	($\phi 20$ mm)
739.0125.016	TW20	($\phi 16$ mm)
739.0125.012	TW20	($\phi 12$ mm)
739.0125.010	TW20	($\phi 10$ mm)
739.0125.008	TW20	($\phi 8$ mm)
739.0125.006	TW20	($\phi 6$ mm)




Combi toolholder
for boring bar and
insert drill

432 田田




Double toolholder
for boring bar

Ø25 mm



Treble toolholder
for boring bar




Boring bar holder

HSK 50 A+C

121-22084


CONNECTION

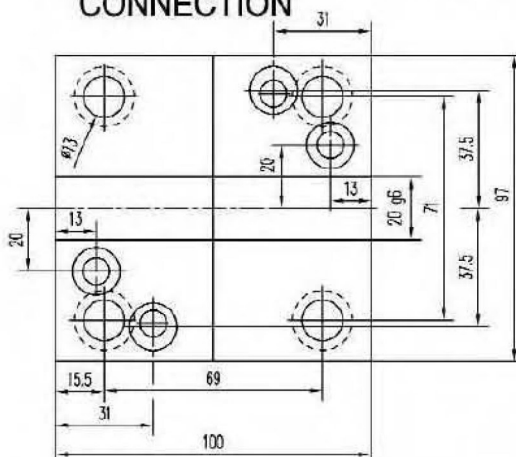






NAKAMURA TOME

WT100

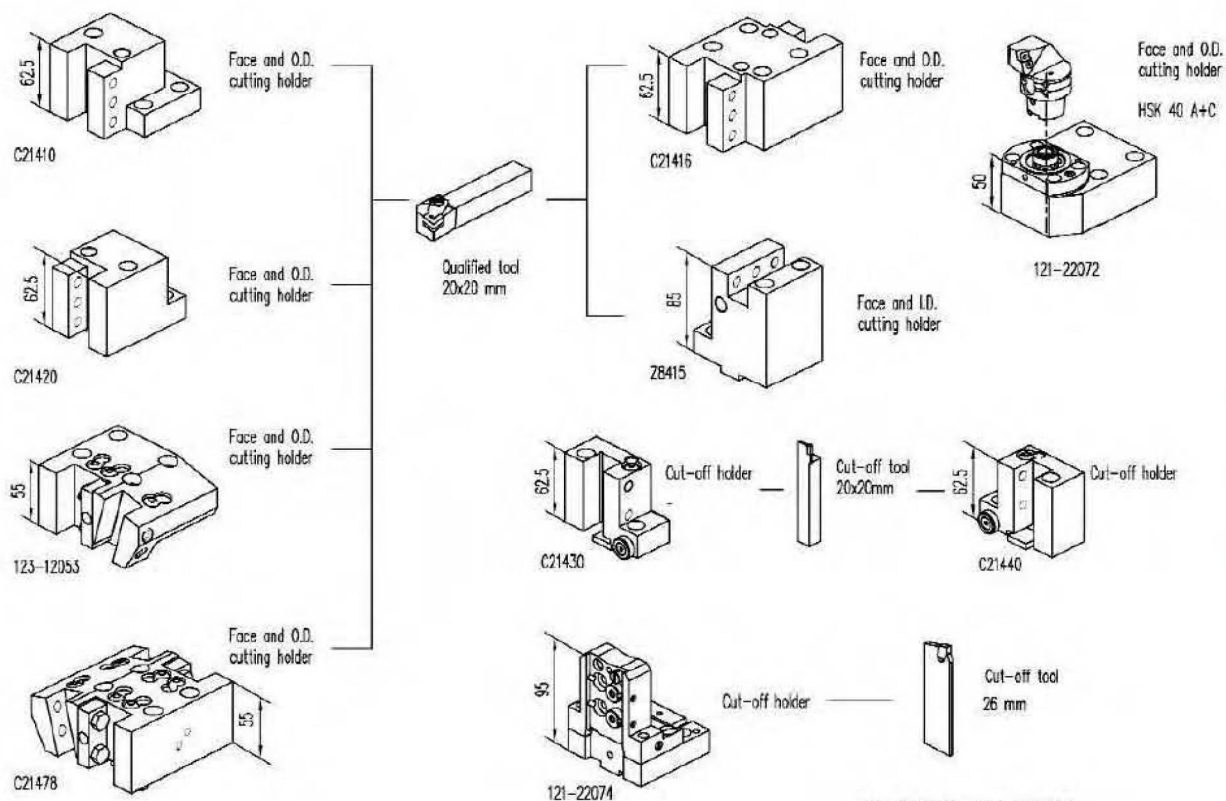


CONNECTION

ACCESSORIES

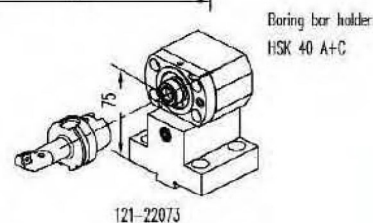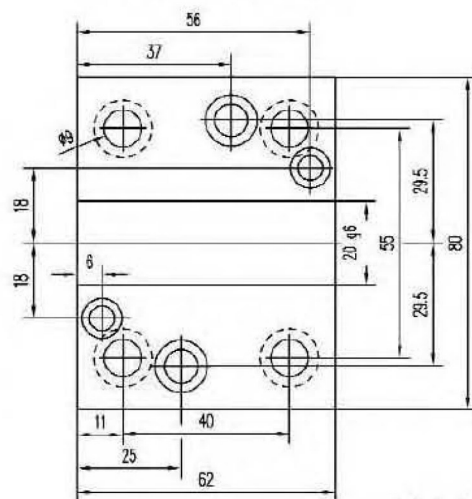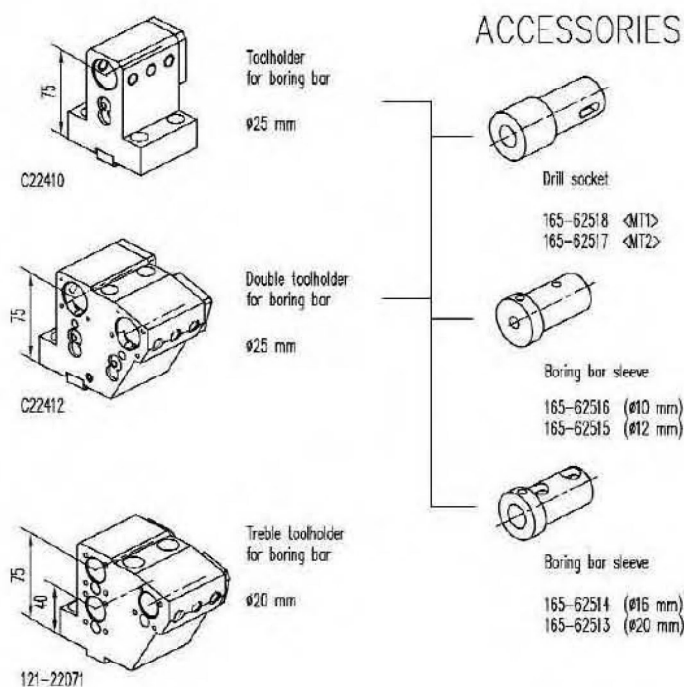


NAKAMURA TOME


WT150 - WTW150 - WTS150
WT250 - SC150 - SC250

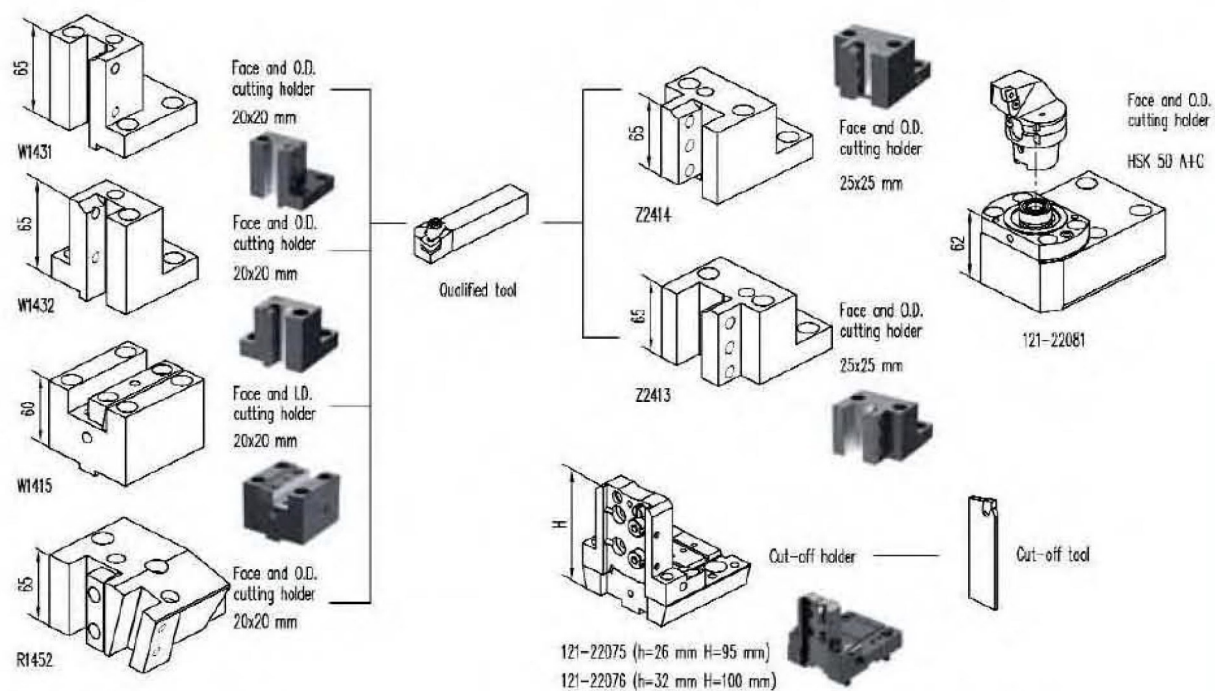

CONNECTION

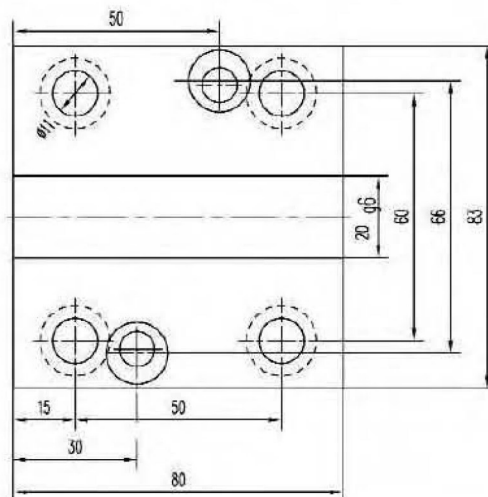


ACCESSORIES

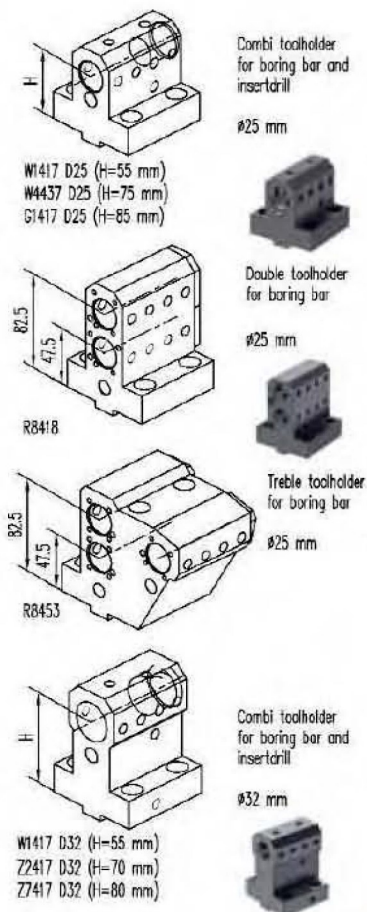


Boring bar sleeve and
throw-away drill socket

739.0125.020	WT250	(#20 mm)
739.0125.016	WT250	(#16 mm)
739.0125.012	WT250	(#12 mm)
739.0125.010	WT250	(#10 mm)
739.0125.008	WT250	(#8 mm)
739.0125.006	WT250	(#6 mm)



Boring bar sleeve and
throw-away drill socket

739.0132.025	WT250	{ø25 mm}
739.0132.020	WT250	{ø20 mm}
739.0132.016	WT250	{ø16 mm}
739.0132.012	WT250	{ø12 mm}
739.0132.010	WT250	{ø10 mm}
739.0132.008	WT250	{ø8 mm}

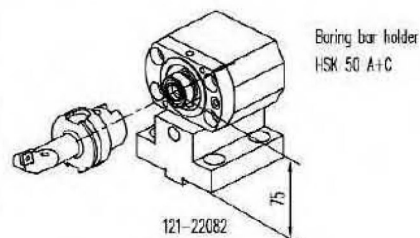

Boring bar holder
HSK 50 A+C